




02

PART TWO

## 自动重叠门系列

Automatic overlapping door series

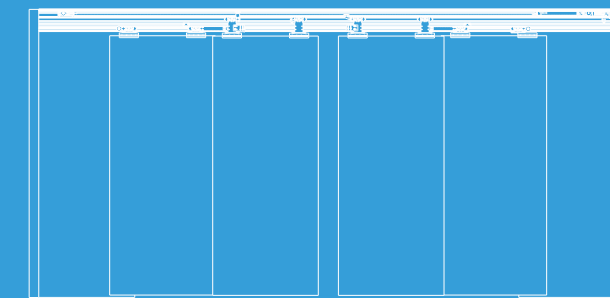

## ORD-150型亚款两重叠自动门


ORD150 sub-model two overlapping automatic doors



### 产品特点 PRODUCT PARAMETERS

1. 直流无刷大功率电机, 运行稳定;
2. 大闭合力微电脑控制器;
3. 适用较宽的们;
4. 门洞需要开最大的净开空间;
5. 安装简单, 联动效果好;
6. 自带遇阻反弹, 安全防夹.



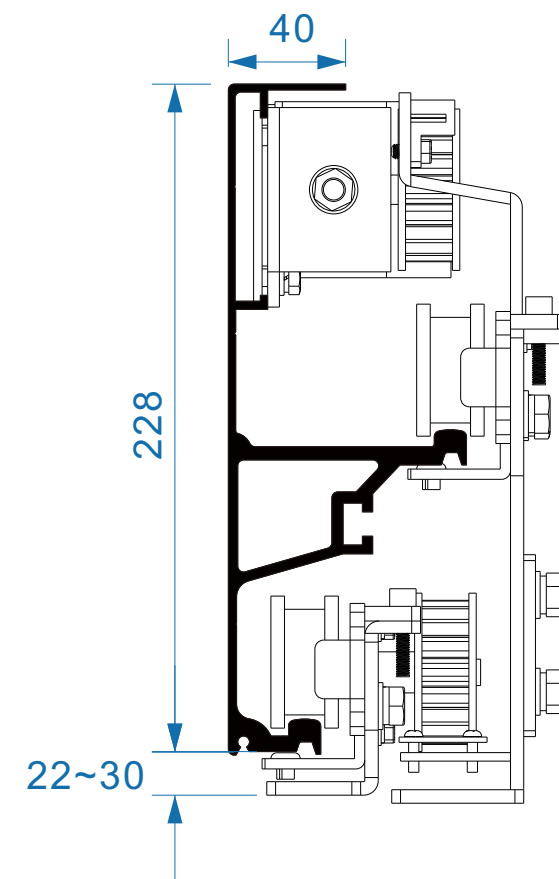


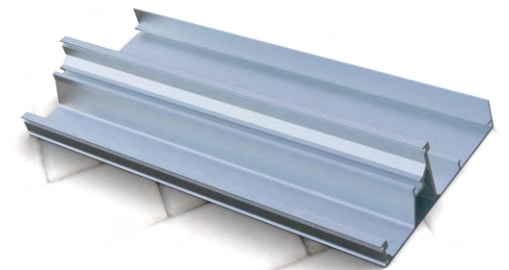

1. Dc brushless high-power motor, stable operation;
2. Large closing force microcomputer controller;
3. Suitable for wider doors;
4. The door needs to open the maximum net opening space;
5. Simple installation, good linkage effect;
6. Come with resistance rebound, safety anti-clip.



### 技术参数 PRODUCT PARAMETERS

电气数据	Electrical data
电源电压: AC220V ± 10%, 50-60Hz 2A	Power supply voltage: AC220V ± 10%, 50-60Hz 2A
额定功率: 100W	Rated power: 100W
开口宽度	Opening width
双开平移门: 900~3000	Double sliding door: 900 ~ 3000
单开平移门: 750~3000	Single sliding door: 750 ~ 3000
门扇重量	Door leaf weight
双开平移门: 最大4 × 120KG	Double opening sliding door: max. 2 × 120KG
单开平移门: 最大2 × 150KG	Single sliding door: max. 1 × 150KG
门扇运行速度	Door leaf running speed
开门速度: 100~550mm/s	Opening speed: 100 ~ 550mm / S
关门速度: 100~550mm/s	Closing speed: 100 ~ 550mm / S
环境条件	Environment condition
温度范围: -20°C~+50°C	Temperature range: - 20 °C ~ + 50 °C
湿度范围: <相对湿度85%	Humidity range: < 85% relative humidity

### 主要配件 MAIN ACCESSORIES

			
控制器 Controller	电机 Motor	尾轮 Pulley	皮带 Belt
			
吊轮 Hanger	轨道 track	遥控器 remote control	

### 可选配件 MAIN ACCESSORIES

				
防夹光线 Anti pinch equipment	影像感应器 Image sensor	门禁机 Access control machine	门夹 Door clip	备用电源 Backup

## ORD-250型欧款两重叠自动门

ORD250 European model two overlapping automatic doors




### 产品特点 PRODUCT PARAMETERS

欧式重型自动门机组,采用现代化设计,应用全球信赖的大功率直流无刷电机及欧式的机械组件,吊轮采用进口高强度尼龙,配合加厚款铝合金轨道,轨道配有减震条,大幅度降低吊轮运行在轨道发出的声音。机组承重达到2×250KG。

欧式设计已经通过多项测试,适用于各大型通道、大型玻璃门,重型工厂车间等场所,运行平稳,安装简便,易于维护。

The European type heavy-duty automatic door unit adopts modern design, applies the high-power DC brushless motor and European type mechanical components that are trusted by the world. The lifting wheel adopts imported high-strength nylon, matched with the thickened aluminum alloy track, and the track is equipped with damping strips, which greatly reduces the sound of the lifting wheel running on the track. The load bearing capacity of the unit reaches 2 × 250KG. The European design has passed many tests and is applicable to large passages, large glass doors, heavy-duty factory workshops and other places, with stable operation, simple installation and easy maintenance.

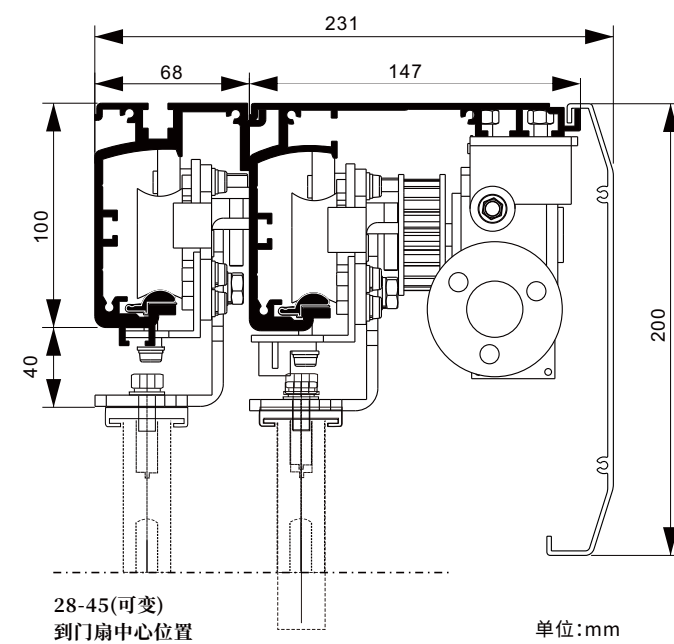

### 技术参数 PRODUCT PARAMETERS

电气数据	Electrical data
电源电压:AC220V±10%, 50-60Hz 2A	Power supply voltage: AC220V ± 10%, 50-60Hz 2A
额定功率:100W	Rated power: 100W
<b>开口宽度</b>	<b>Opening width</b>
双开平移门:650~1250	Double sliding door: 650 ~ 1250
单开平移门:750~1600	Single sliding door: 750 ~ 1600
<b>门扇重量</b>	<b>Door leaf weight</b>
双开平移门:最大2×250KG	Double opening sliding door: max. 2 × 250KG
单开平移门:最大1×300KG	Single sliding door: max. 1 × 300KG
<b>门扇运行速度</b>	<b>Door leaf running speed</b>
开门速度:150~460mm/s	Opening speed: 150 ~ 460mm / S
关门速度:150~460mm/s	Closing speed: 150 ~ 460mm / S
<b>环境条件</b>	<b>Environment condition</b>
温度范围:-20℃~+50℃	Temperature range: - 20 °C ~ + 50 °C
湿度范围:<相对湿度85%	Humidity range: < 85% relative humidity

### 主要配件 MAIN ACCESSORIES


			
控制器 Controller	电机 Motor	轨道 track	尾轮 Pulley
			
吊轮 Hanger	皮带 Belt	遥控器 remote control	

### 可选配件 MAIN ACCESSORIES

				
防夹光线 Anti pinch equipment	影像感应器 Image sensor	门禁机 Access control machine	门夹 Door clip	备用电源 Backup

## ORD-500型欧款三重叠自动门

ORD500 type European three overlapping automatic door

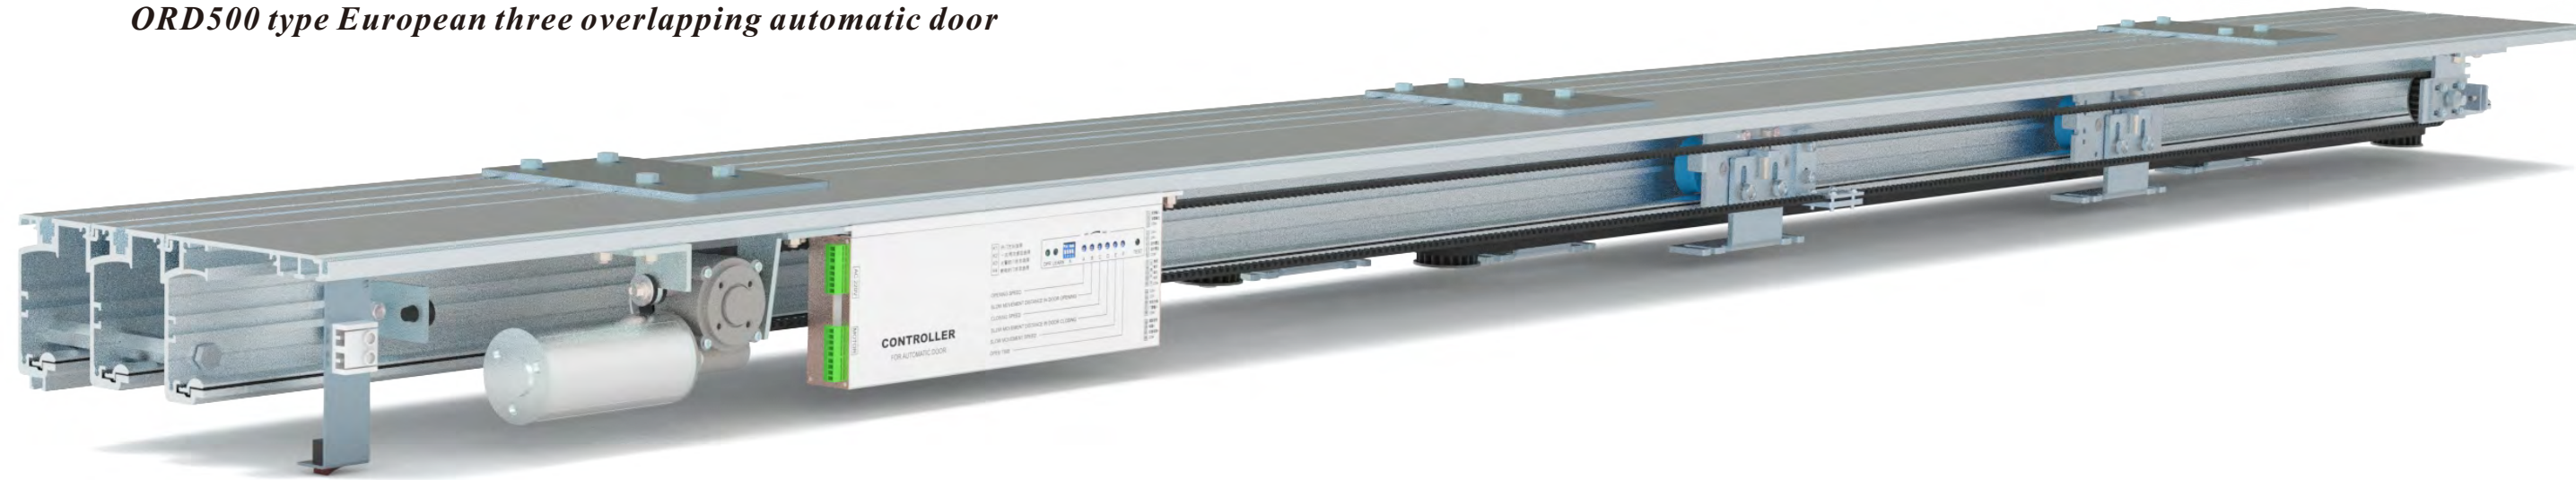


### 产品特点 PRODUCT PARAMETERS

欧式重型自动门机组,采用现代化设计,应用全球信赖的大功率直流无刷电机及欧式的机械组件,吊轮采用进口高强度尼龙,配合加厚款铝合金轨道,轨道配有减震条,大幅度降低吊轮运行在轨道发出的声音。机组承重达到2×250KG。

欧式设计已经通过多项测试,适用于各大型通道、大型玻璃门,重型工厂车间等场所,运行平稳,安装简便,易于维护。



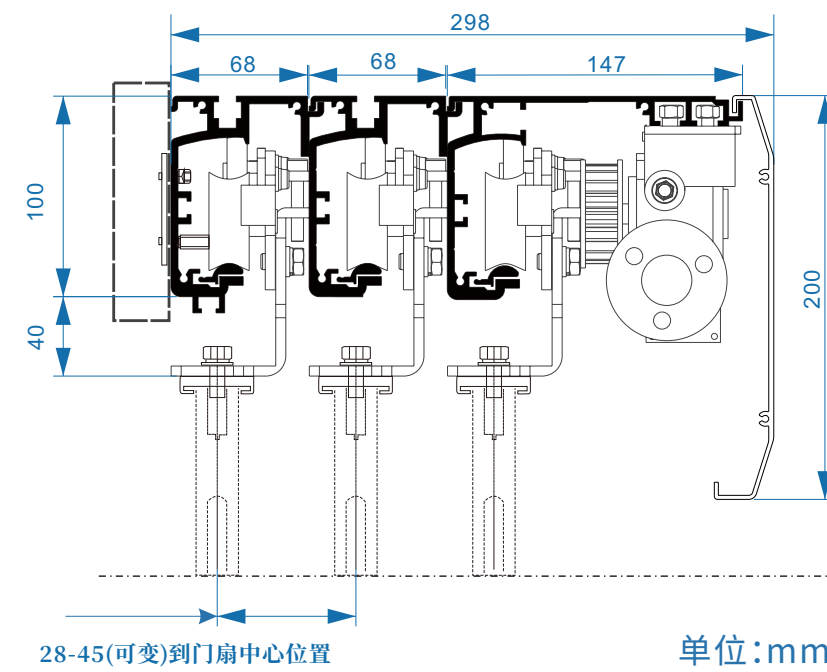




The European type heavy-duty automatic door unit adopts modern design, applies the high-power DC brushless motor and European type mechanical components that are trusted by the world. The lifting wheel adopts imported high-strength nylon, matched with the thickened aluminum alloy track, and the track is equipped with damping strips, which greatly reduces the sound of the lifting wheel running on the track. The load bearing capacity of the unit reaches 2 × 250KG. The European design has passed many tests and is applicable to large passages, large glass doors, heavy-duty factory workshops and other places, with stable operation, simple installation and easy maintenance.



### 技术参数 PRODUCT PARAMETERS

电气数据	Electrical data
电源电压:AC220V±10%, 50-60Hz 2A	Power supply voltage: AC220V ± 10%, 50-60Hz 2A
额定功率:100W	Rated voltage: 100W
开口宽度	Opening width
双开平移门:650~1250	Double sliding door: 650 ~ 1250
单开平移门:750~1600	Single sliding door: 750 ~ 1600
门扇重量	Door leaf weight
双开平移门:最大2×250KG	Double opening sliding door: max. 2 × 250KG
单开平移门:最大1×300KG	Single sliding door: max. 1 × 300KG
门扇运行速度	Door leaf running speed
开门速度:150~460mm/s	Opening speed: 150 ~ 460mm / S
关门速度:150~460mm/s	Closing speed: 150 ~ 460mm / S
环境条件	Environment condition
温度范围:-20°C~+50°C	Temperature range: - 20 °C ~ + 50 °C
湿度范围:<相对湿度85%	Humidity range: < 85% relative humidity
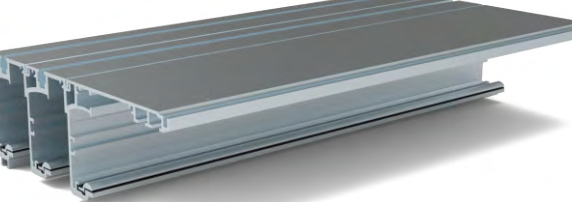
### 主要配件 MAIN ACCESSORIES

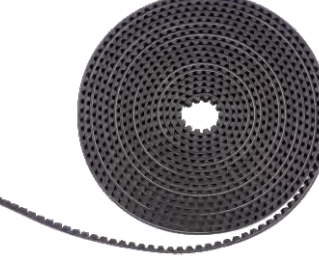			
控制器 Controller	电机 Motor	轨道 track	尾轮 Pulley
			
吊轮 Hanger	皮带 Belt	遥控器 remote control	

### 可选配件 MAIN ACCESSORIES

				
防夹光线 Anti pinch equipment	影像感应器 Image sensor	门禁机 Access control machine	门夹 Door clip	备用电源 Backup